



AC-260P/156-60S
 AC-265P/156-60S
 AC-270P/156-60S
 AC-275P/156-60S
 AC-280P/156-60S

www.axitecsolar.com

AXITEC
 high quality german solar brand

AXIpower

60 cell polycrystalline
 High performance solar module

The advantages:


- 15** Years 15 years manufacturer's warranty
- P-Max** Highest performance due to specifically selected technologies and materials
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 5.400 Pa** Maximum 5400 Pa snow load
- 100%** 100% electroluminescence inspection
- Soft Grip** High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction
- IP 67** High quality junction box and connector systems



Fig. similar
 60P156EN180321A

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance

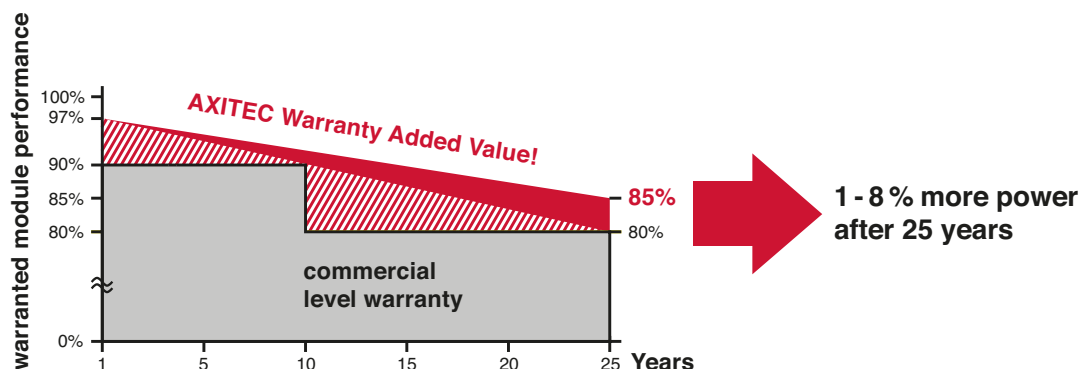

Distributed by:



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1,5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-260P/156-60S	260 Wp	30,92 V	8,43 A	9,01 A	38,00 V	15,98 %
AC-265P/156-60S	265 Wp	30,98 V	8,60 A	9,20 A	38,16 V	16,29 %
AC-270P/156-60S	270 Wp	31,12 V	8,71 A	9,25 A	38,21 V	16,60 %
AC-275P/156-60S	275 Wp	31,25 V	8,83 A	9,32 A	38,29 V	16,90 %
AC-280P/156-60S	280 Wp	31,48 V	8,90 A	9,37 A	38,61 V	17,21 %

Design

Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 polycrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

Mechanical data

L x W x H	1640 x 992 x 35 mm
Weight	18,0 kg with frame

Power connection

Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx. 1,1 m, 4 mm ²
Plug-in system	Plug/socket IP67

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m ²
Reverse current feed IR	16,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients


Voltage U _{oc}	-0,30 %/K
Current I _{sc}	0,04 %/K
Output P _{mpp}	-0,42 %/K

Low-light performance (Example for AC-260P/156-60S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	1,70 A	30,10 V
400 W/m ²	3,42 A	30,15 V
600 W/m ²	5,41 A	30,52 V
800 W/m ²	6,82 A	30,86 V
1000 W/m ²	8,43 A	30,92 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	840

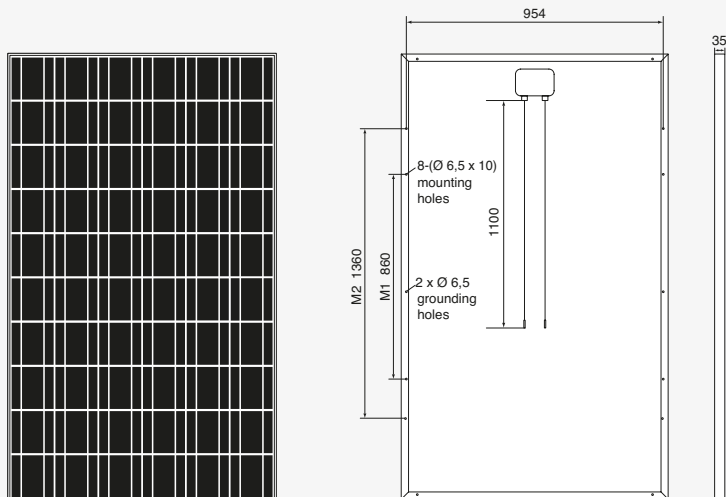

All dimensions in mm